

APPLICATION

A wall mounted surface architectural cylinder designed to provide direct and indirect illumination. Energy efficient compact fluorescent lamps coupled with a variety of lenses, reflectors, and finishes to satisfy a variety of applications.


PRODUCT DATA

REFLECTOR: Heavy gauge spun aluminum reflector with Alzak finish and self-trimming polished flange. Reflectors are available with a variety of lenses and finishes.

HOUSING: The up/down cylinders have a decorative reveal, which can be finished in any complimentary color or texture. The standard finish is matte white powder coat paint (specify others). The fixture is designed for wall mounting to a standard 4" octagon electrical junction box.

ELECTRICAL: 120 to 277 volt input, 50 to 60 Hz under 10% THD electronic ballasts are instant start. ETL/CETL Damp location listed.

SOCKET: Positive latch 4 pin thermoplastic.

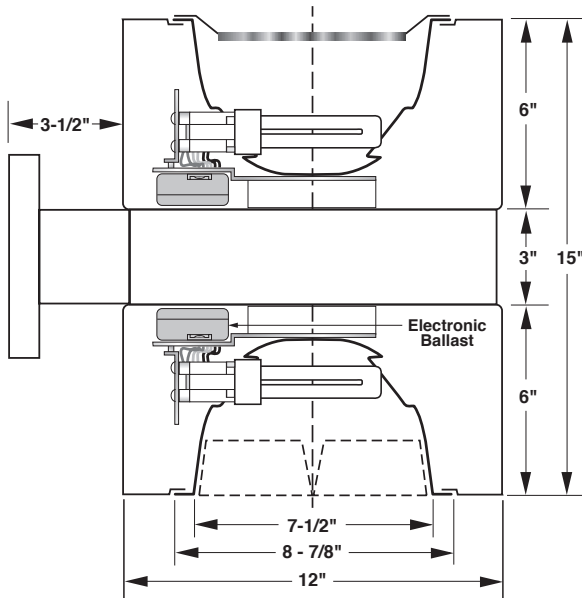

For Damp Location
Manufactured and tested to UL#1598 and CSA standards.
Note: Suitable for damp location.



SERIES C43WHF Direct/Indirect
Cylinder Compact Fluorescent – 12" Diameter



LAMP DATA:

LAMP	WATTS	BASE	BALLAST	LUMENS
Quad Tube 4-Pin*	13	G24q-1	Elec.	900
	18	G24q-2	Elec.	1250
	26	G24q-3	Elec.	1800
Triple Tube 4-Pin**	26	GX24q-2	Elec.	1800
	32	GX24q-3	Elec.	2400
	42	GX24q-4	Elec.	3200

*Standard lamping, initial lumens.
**Osram/Sylvania, initial lumens (delta/hex lamp).

WALL MOUNTING: Standard wall bracket protrudes 3.5" from wall with provisions for mounting to 4" octagon junction box.

Catalog #: C4SHF

Example: C43SHF226QE4 / (upper) / (lower)

Example: C43SHF226QE4

Fixture Series	Lamp/Wattage	Ballast/Voltage	Options
Wall C43WHF	QTY. TYPE	E4 / Electronic 120/277	See Below
	2 13 Quad		
	2 18 Quad		
	2 26 Quad		
	1 26T Triple		
	1 32T Triple		
1 42T Triple			

Optional Finishes

Suffix #

- Black Cylinder Housing – B
- Bronze Cylinder Housing..... – Z
- Galvanite..... – GAL
- Satin Aluminum..... – SA
- Metallic Aluminum..... – MA

Fixture: _____ Type: _____
Project: _____

(upper) / (lower)
Example: 8SHFPLSCLPF / 8SHFXBSCLPF

Trim	Trim Finish
8SHF	– Open Reflector
8SHFXB	– Cross Blade
8SHFFL	– Fresnel Lens Splay
8SHFC73	– Corning C73 Splay
8SHFPL	– Pattern 12 Acrylic Prismatic Splay
	SCL/BL – Specular Clear Alzak, Polished Flange

NOTE: Specify upper and lower reflector when ordering
For other finishes, consult reflector section.

All Pathway® products meet or exceed requirements as established by the National Electrical Code. Specifications subject to change without notice. Alzak® is a registered trademark of Alcoa.



Pathway Lighting Products, Inc., P.O. Box 591, Old Saybrook, CT 06475-0591
voice 800.342.0592 • fax 800.207.0090 • www.pathwaylighting.com • e-mail: sales@pathwaylighting.com

Series C43WHF - Direct/Indirect Compact Fluorescent - 12" Diameter